

P Series 3-Phase Foot(Leg) Mounted Type

0.2kW

■ SPECIFICATION


■ MOTOR

Frame No.	Output (kW)	Model Name	Poles	Voltage (V)	Freq. (Hz)	Duty	Rated Load					Degrees of protection	Insulation Classification	Protective Cooling System
							Current (A)	Speed (r/min)	Torque (kgf-cm)	Power Factor(p.u.)	Efficiency (%)			
63M	0.2	PMAY020-2R4L□□	2	220/380	60	CONT.	1,20/0,70	3450	5,8	0,73	59,5	IP55	F	Totally Enclosed Fan-Cooled
					50		1,10/0,65	2835	6,2	0,72	55,2			
		2	460	60	0,65		3435	6,0	0,73	56,6				
			4	220/380	60		1,00/0,60	1634	12,0	0,74	71,4			
		4			230/400		50	0,85/0,50	1360	13,0	0,78			
			60	0,50			1680	11,5	0,82	75,0				

- Note) • Foot (Leg) Mounted Type and Flange Mounted Type have the same specifications
 • Actual rated power for voltage U6 model is 0,18kW at 230V/400V 50Hz and 0,21kW at 460V 60Hz

■ PM-L Type DIMENSIONS [Foot(Leg) Mounted Type]

UNIT = mm

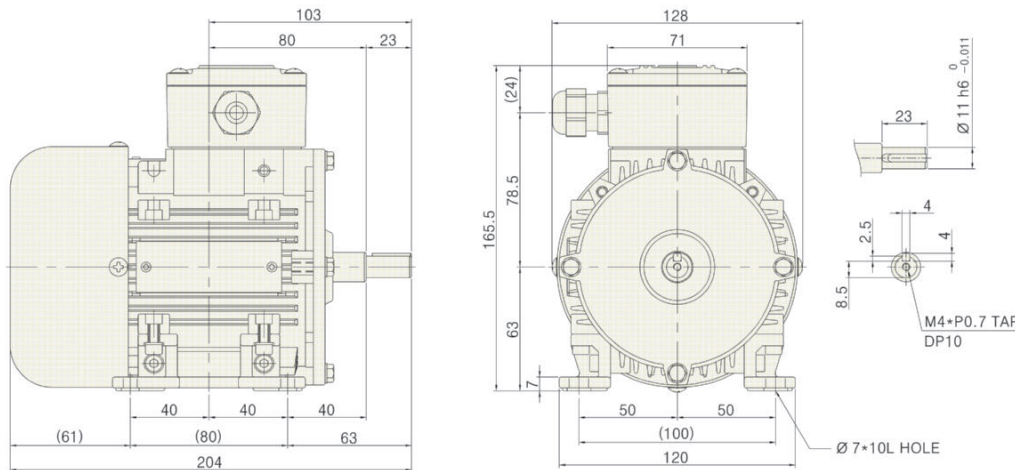

- Note) • Key and Key groove tolerance : KS B 1311
 • The total length of the products may vary depending on the mounting position of the discrete foot
 • ØD tolerance for output shaft : KS B 0401

Bearing No.		Weight
Load	Unload	
6202ZZ	6202ZZ	4,35kg

Model Name Coding
 9Page

Specification for output shaft
 30Page

Technological Data
 101Page